


- Unique service filter alarm
- Eliminates the build-up of algae and water in your tanks
- Reduces cost of filter maintenance
- 99% water and particulate removal
- Compact Design
- Vented NEMA 3R Enclosure
- 7 day timer feature

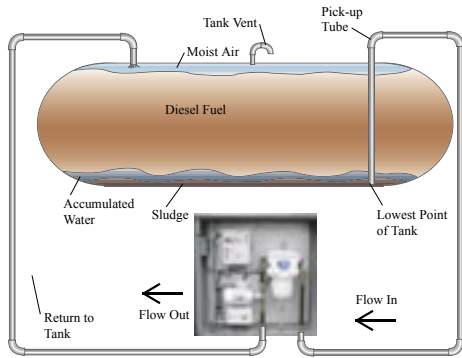

Technical Specification

Volt	110 or 220v AC
Amp.	4.8 Amps - 7.5 Amps
Watts	750
Flow Rate	600 GPH / 2271 LPH
Pump Body	Brass
Gears	Bronze
Shaft	Stainless Steel
Seal	Fluoroelastomer lip seal
AC Motor	110/220v 50/60 HZ
Weight	200 lbs/91kg

Self Ventilated Continuous Duty Motor overload protected

Harsh Environment Enamel Protected



Part Number Description

FPS-600S02	220v Enclosure unit
FPS-600S02-01	110v Enclosure unit

Filter elements available:

04010	- 10 Micron
04030	- 30 Micron (Standard)
04060 S	- 60 Micron Stainless Steel

Model	A	B	C	D	Weight
FPS-600S02	36.00"	36.00"	47.00"	11.00"	200 lbs/91kg
FPS-600S02-01	36.00"	36.00"	47.00"	11.00"	200 lbs/91kg

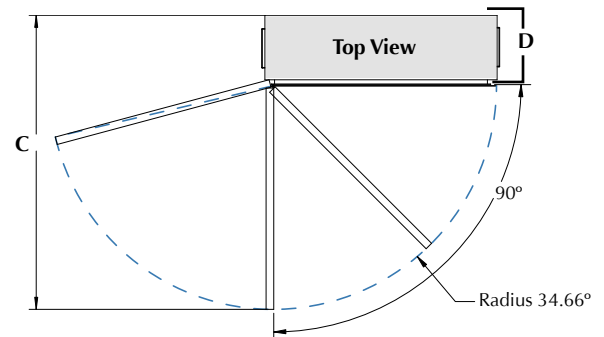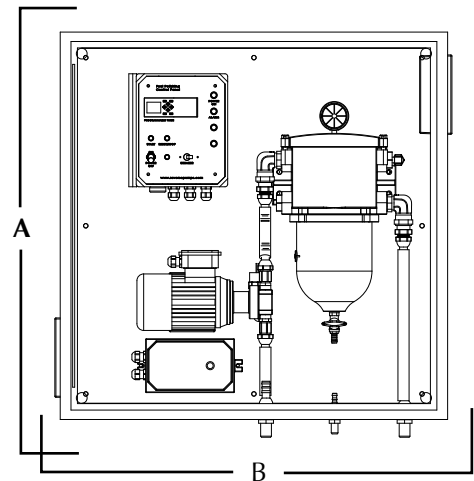

Drawing dimensions in INCHES for reference only Technical drawings available upon request